SPEEDWAY

SPM-557F Automatic Case Sealer

Side Belt Drive

SPM-558F Automatic Case Sealer


Top & Side Belt Drive

Features:

The **SPM-557F** uses a new taping head incorporating a V shaped plate (patented) designed to keep the tape straight and in position for consistent sealing of every carton. This design is superior to previous blower devices. Driven by two side drive belts, each belt has a separate drive mechanism using a special bearing bracket. This provides higher precision, lower noise and lengthens belt life. Tape overlap length can be adjusted from 55mm-65mm.

The **SPM-558F** uses the same features above but has a total of 4 drive belts, two side belts and two top drive belts. Three motors are supplied to drive belts. The machine has been designed for heavy cartons and can also seal tall-thin cartons. A flexible cushion prevents jamming of cartons under the top

A flexible cushion prevents jamming of cartons under the top taping head.

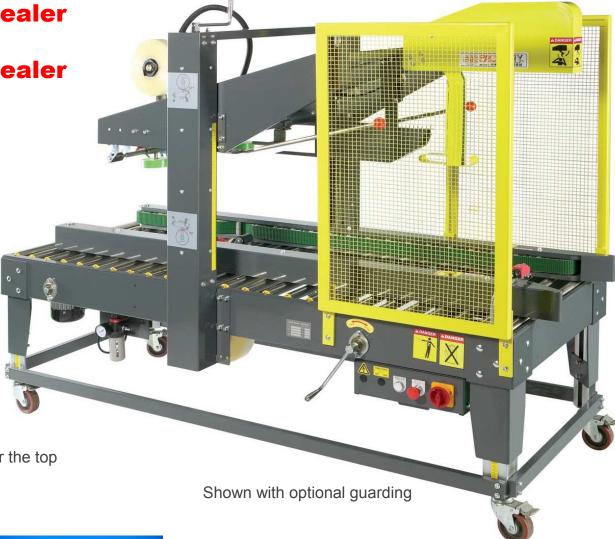



SPM-557F Case Sealer

Specifications

Voltage 110 V 1 PH 60 HZ Power 10 amps

Two motors, 370W

20M/min (66') / min. Sealing Speed

Cartons/min 6—11 2" or 3" Tape Width

2" or 2.5" tape can also be used in 3" tape

head with paper roll

L 200-700mm x W 120-500mm x Sealing Size

H 110-500mm

Shipping Weight 175 kg / 385 lbs

SPM-558F Case Sealer

Specifications

Voltage 110 V 1 PH 60 HZ

Power 10 amps

Three motors, 555W Sealing Speed 20M/min (66') / min.

Cartons/min 6—11 2" or 3" Tape Width

2" or 2.5" tape can also be used in 3" tape


head with paper roll


L 200-550mm x W 200-500mm x Sealing Size

H 120-500mm

Shipping Weight 200 kg / 440 lbs

Dimensions






Specifications are subject to change without notice-

NOTE: Not suitable to use these machines if the carton's height

exceeds the length.

Manufactured in Taiwan

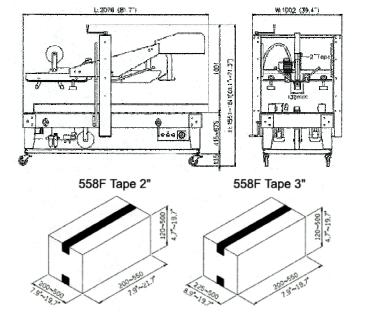

Distributed by:

SPEEDWAY PACKAGING MACHINERY INC.

P.O. Box 520 10 Gormley Industrial Ave., Unit 1 Gormley, Ontario L0H 1G0 905-888-5344