SPEEDWAY

SPM-553S Case Sealer

Side Belt Drive

SPM-554TS Case Sealer

Top & Side Belt Drive

Features:

The **SPM-553S** uses a new taping head incorporating a V shaped plate (patented) designed to keep the tape straight and in position for consistent sealing of every carton. This design is superior to previous blower devices. Driven by two side drive belts, each belt has a separate drive mechanism using a special bearing bracket. This provides higher precision, lower noise and lengthens belt life. Tape overlap length can be adjusted from 55mm-65mm.

The **SPM-554TS** uses the same features above but has a total of 4 drive belts, two side belts and two top drive belts. Three motors are supplied to drive belts. The machine has been designed for heavy cartons and can also seal tall-thin cartons. A flexible cushion prevents jamming of cartons under the top taping head.

OPTIONS: AVAILABLE IN STAINLESS STEEL



Machine shown with optional infeed and outfeed extension roller tables—sold separately L 500 mm x W 530 mm

Speedway Packaging Machinery Inc. www.spmi.ca

SPM-553S Case Sealer

Specifications

Voltage 110 V 1 PH 60 HZ

Power 10 amps

Two motors, 370W

Sealing Speed 20M/min (66') / min. Cartons/Hr 2400 cartons per hour

Tape Width 2" or 3"

2" or 2.5" tape can also be used in 3" tape

head with paper roll

Sealing Size L 150mm x W 120 - 500mm x H 85-500mm

Shipping Weight 175 kg / 385 lbs

SPM-554TS Case Sealer

Specifications

Voltage 110 V 1 PH 60 HZ

Power 10 amps

Three motors, 555W
Sealing Speed 20M/min (66') / min.
Cartons/Hr 2400 cartons per hour


Tape Width 2" or 3"


2" or 2.5" tape can also be used in 3" tape


head with paper roll

Sealing Size L 150mm x W 200 - 500mm x H 120-500m


Shipping Weight 200 kg / 440 lbs







Dimensions

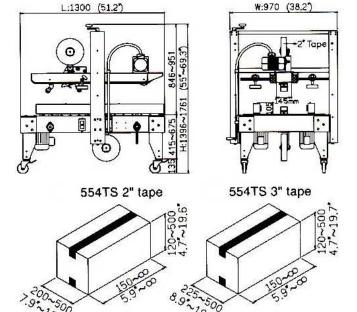

Distributed by: size: mm/inch
SPEEDWAY PACKAGING MACHINERY INC.

P.O. Box 520 10 Gormley Industrial Ave., Unit 1 Gormley, Ontario L0H 1G0 905-888-5344

Specifications are subject to change without notice-

NOTE: Not suitable to use these machines if the carton's height

exceeds the length.

Manufactured in Taiwan